

**50D50-842**



## 50D50-842 UNIVERSAL DIRECT SPARK IGNITION CONTROL KIT FOR ALL GASES

Microprocessor Based Gas Ignition Control for Heating Appliance Using Either Natural or LP Gas. Proof of Flames is Accomplished. The Unit is Designed as a Direct Spark Ignition Source

### FEATURES


- Color LED indicator for diagnostics.
- 1/4" and 3/16" quick connect terminals.
- Program keys.
- Damper interface.

### SPECIFICATIONS

Electrical Ratings . . . . . Input 18-30 VAC, 25 VAC nominal  
 Maximum Input Current @ 25 VAC . . . . . 0.2A + MV @ 25°C  
 Ambient Operating Range . . . . . -40° to +175°F  
 Flame Establishment Time . . . . . .8 sec  
 Mounting . . . . . Multipoise  
 Agency Approvals . . . . . CSA USA / CANADA

### 50D50-842 CONFIGURATION OPTIONS (All Times in Seconds)

Model Number	Key	Trial for Ignition	Prepurge	Retries	Interpurge
50D50-842	A	4	0	2	90 sec.
	B	4	30	2	90 sec.
	C	7	0	2	90 sec.
	D	7	30	2	90 sec.
	E	7	0	0	N/A
	F	7	30	0	N/A
	G	11	0	0	N/A
	H	11	30	0	N/A

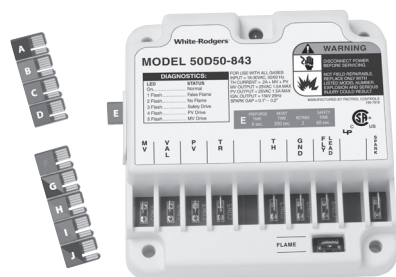

**50D50-843**



## 50D50-843 UNIVERSAL PROVEN PILOT SPARK CONTROL KIT FOR ALL GASES

Microprocessor Based Gas Ignition and Primary Safety Control Designed for Interrupted Spark and Burner Supervision of All Gases Used in Gas Fired Appliance Applications

### FEATURES

- Field service replacement for most Honeywell, Robertshaw, Johnson Controls and UTEC Intermittent Pilot Ignition Controls.
- Provides ignition, proof of ignition and precise timing.
- Works with single rod or dual rod remote sensor.
- Color LED indicator for diagnostics.

### SPECIFICATIONS

Electrical Ratings . . . . . Input 18-30 VAC, 25 VAC nominal  
 Maximum Input Current @ 25 VAC . . . . . 0.2A + MV + PV @ 25°C  
 Flame Out Recognition Time . . . . . 8 seconds  
 Ambient Operating Range . . . . . -40° to +176°F (-40° to +80°C)  
 Dimensions . . . . . 4.13" L x 4.13" W x 1.5" H  
 Agency Approvals . . . . . CSA USA/CANADA

### 50D50-843 CONFIGURATION OPTIONS (All Times in Seconds)

Model Number	Key	Reset Time	Prepurge	Retries	Safety Time
50D50-843	A	300	0	Continuous	90
	B	300	30	Continuous	90
	C	300	0	Continuous	30
	D	300	30	Continuous	30
	E	300	0	2	60
	F	300	30	2	60
	G	300	0	Continuous	15
	H	N/A	30	N/A	Continuous
	I	300	0	Continuous	4
	J	300	30	Continuous	4