


FlowCheck/Thermometers/Tridicator

FlowCheck–Gravity Check Valves



Sparco FlowChecks prevent the flow of water to any part of a system when the pump is shut off. They permit summer/winter operation of indirect water heaters. Sparco Flowchecks are easy to clean. Just unscrew the top of the valve for inspection and cleaning. Bronze and brass construction. To allow gravity flow, the Flowcheck can be changed to manual operation by turning the hand wheel counterclockwise (open position).

ORDER NUMBER	Size (in.)	Connection	Body	Type	Dimensions (in.)						Weight	
					Height		Length		Width			
					in	mm	in	mm	in	mm	lb	kg
FC200SB	3/4	Sweat	Brass	Horizontal	3-11/16	93.7	3-5/16	84	1-1/2	38	1.1	0.5
FC201SB	1	Sweat	Brass	Horizontal	3-29/32	99.2	3-11/16	93.7	2-5/16	58.7	1.5	0.7

Thermometer–2 in. and 2-1/2 in. Thermometers with Thermowells



Sparco offers 2 in. and 2-1/2 in. diameter thermometer with a steel casing. The calibration ranges from 32 F to 250 F and 0 C to 100 C. A brass thermowell is included to allow removal of thermometer without draining the system.

ORDER NUMBER	Temperature Range	Material	Dial Size		Length		Weight	
			in.	mm	in.	mm		
GT161	32 -250 F (0 -120 C)	Steel case,	2	51	1/2 NPT x 2 long	1/2 NPT x 51 long	0.21	0.09
GT162		Brass well	2-1/2	63.2			0.25	0.11


TD–Tridicator



Pressure/temperature gauge with relief set point indicator (not shown) for boilers.

MAXIMUM PRESSURE: 75 psi.

TEMPERATURE RANGE: 60 F to 320 F (15 C to 160 C).

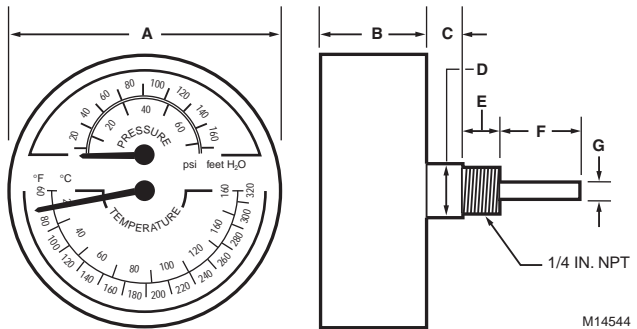

M14544

ORDER NUMBER	A		B		C		D		E		F		G	
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
TD090	3-1/8	79.4	1-3/32	27.7	13/32	10.3	18/32	14	1/2	12.7	29/32	22.9	15/64	5.9
TD166					29/32	23	25/32	19.8			1-21/32	42		

For order entry, please fax your P.O. directly to Honeywell Sparco. Fax 800-777-2726 or 401-738-4156
Telephone 401-738-4290 for customer service.