





## Cast Iron Float & Thermostatic Steam Traps FTI-15, FTI-30, FTI-75, FTI-125, FTI-200

The Spirax Sarco FTI contains a float valve mechanism which modulates to discharge condensate continuously at steam temperature while non-condensable gases are released by a separate internal balanced pressure thermostatic air vent. The in-line piping connections simplify installation.

Model	FTI-15	FTI-30	FTI-75	FTI-125	FTI-200
<b>PMO</b>	15 psig	30 psig	75 psig	125 psig	200 psig
<b>Sizes</b>	1/2", 3/4", 1", 1-1/2"				
<b>Connections</b>	NPT				
<b>Construction</b>	Cast Iron Body & Cover Stainless Steel Internals				
<b>Options</b>	Gauge Glass, Vacuum Breaker				

### Typical Applications

Air heating coils, heat exchangers, steam main drip stations; small process equipment, particularly when controlled by a modulating temperature control valve; replacement of less efficient inverted bucket traps on unit heating equipment.

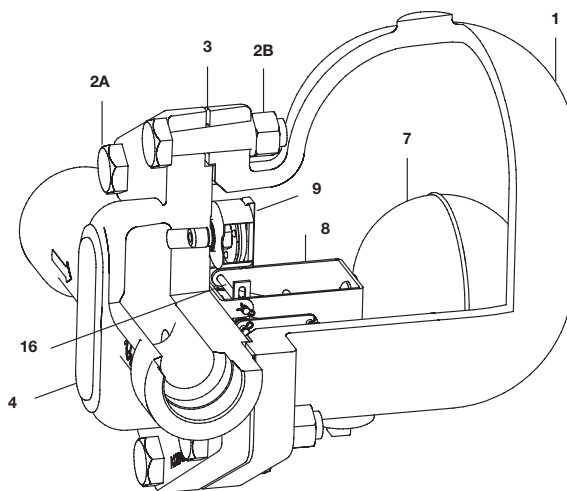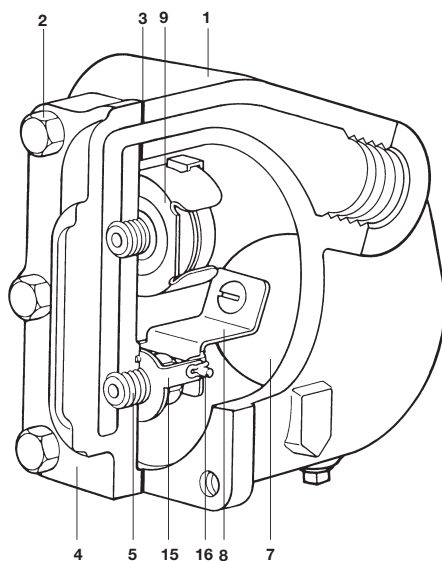

### Limiting Operating Conditions

<b>Max. Operating Pressure (PMO)</b>	<b>FTI-15:</b>	15 psig (1.0 barg)
	<b>FTI-30:</b>	30 psig (2.1 barg)
	<b>FTI-75:</b>	75 psig (5.2 barg)
	<b>FTI-125:</b>	125 psig (8.6 barg)
	<b>FTI-200:</b>	200 psig (13.8 barg)

<b>Max. Operating Temperature</b>	450°F
	all operating pressures

### Pressure Shell Design Conditions

<b>PMA</b>	200 psig/up to 450°F	13.8 barg/up to 232°C
	Max. allowable pressure	

<b>TMA</b>	450°F/0-200 psig	232°C/0-13.8 barg
	Max. allowable temperature	

### Construction Materials



No.	Part	Material
1	Body	Cast Iron
2	Cover Screws	Carbon Steel
2A	Cover Bolts	Alloy Steel
2B	Cover Nuts 3/4" & 1"	7/16 - 14 UNC-2A
3	Cover Gasket	Graphite
4	Cover	Cast Iron
5	Valve Seat	Stainless Steel
7	Ball Float	Stainless Steel
8	Float Arm	Stainless Steel
9	Air Vent Assembly	Stainless Steel
	Air Vent Head	Stainless Steel
	Air Vent Seat	Stainless Steel
15	Seat Bracket	Stainless Steel
16	Pivot Pins	Stainless Steel
18	Valve Head	Stainless Steel

Local regulation may restrict the use of this product below the conditions quoted. Limiting conditions refer to standard connections only.  
In the interests of development and improvement of the product, we reserve the right to change the specification.

TI-2-321-US 4.12

# Cast Iron Float & Thermostatic Steam Traps

## FTI-15, FTI-30, FTI-75, FTI-125, FTI-200

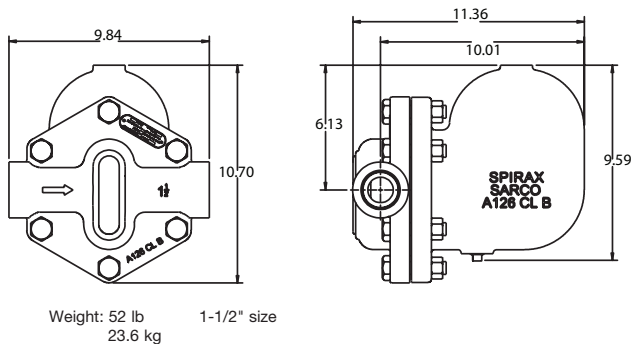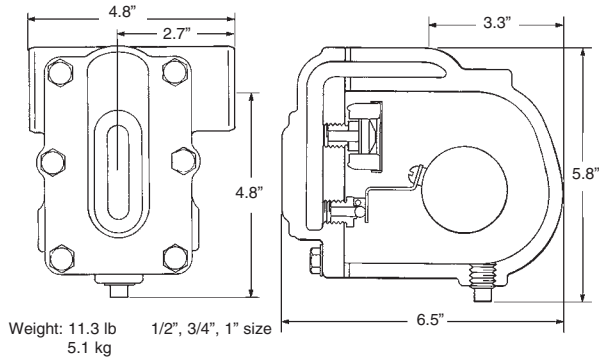

### Sample Specification

Steam traps shall be of the mechanical ball float type having cast iron bodies, NPT horizontal in-line connections, and all stainless steel internals. Incorporated into the trap body shall be a stainless steel balanced pressure thermostatic air vent capable of withstanding 450°F and resisting waterhammer without sustaining damage. Internals of the trap shall be completely servicable without disturbing the piping.

### Installation

A pipeline strainer should be installed ahead of any steam trap. Full-port isolating valves should be placed to permit servicing. The trap should be installed below the drainage point of the equipment with a collecting leg before the trap, in a position so that the float arm is in a horizontal plane and the float rises and falls vertically with the flow direction as indicated on the body. Refer to the IMI which accompanies the product for complete instructions.

### Maintenance

This product can be maintained without disturbing the piping connections. Complete isolation from both supply and return line is required before any servicing is performed. The trap should be disassembled periodically for inspection and cleaning of the valve head and seat, operating mechanism and air vent. Worn or damaged parts should be replaced using a complete valve mechanism assembly and/or air vent assembly.

**Complete installation and maintenance instructions are given in the IMI, which accompanies the product.**

### Spare Parts

