

FLOW CONTROL VALVES




FLO-CHEKS

Taco Flo-Cheks are available in cast iron universal threaded body design and bronze sweat in-line body design. The valve stem and disc assembly are easily removed for

cleaning. The Flo-Cheks are available in sizes 3/4-inch through 2-inch. The Taco MPV can be used for sizes 2 1/2-inch through 10-inch.

SIZE & DIMENSIONS

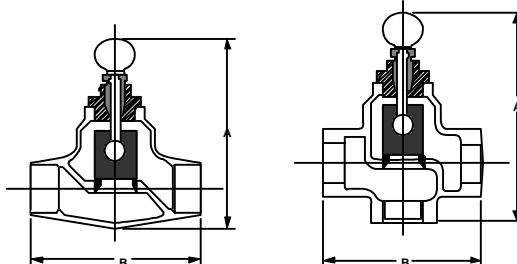

Product Number	Size	Body	Type	Connections		Maximum Operating Temp.	Maximum Working Pressure	Resistance In Feet of Pipe Equivalents	Dimensions		Ship. Wgt. Lbs.
				Inlet	Outlet				A	B	
219	3/4"	Bronze	Horiz.	Sweat	Sweat	270°	125 psig.	27	3 3/32"	3 3/8"	1.1
241	1"	Bronze	Horiz.	Sweat	Sweat	270°	125 psig.	42	4 11/16"	4 1/4"	1.8
218	3/4"	C.I.	Univ.	NPT	NPT	270°	125 psig.	27	4 29/32"	3 29/32"	1.1
220	1"	C.I.	Univ.	NPT	NPT	270°	125 psig.	42	5"	4 1/4"	3
221	1 1/4"	C.I.	Univ.	NPT	NPT	270°	125 psig.	60	5 11/16"	4 3/4"	4.8
222	1 1/2"	C.I.	Univ.	NPT	NPT	270°	125 psig.	63	6 13/32"	6"	7.8
223	2"	C.I.	Univ.	NPT	NPT	270°	125 psig.	83	7"	6 3/4"	10.3

VENTURI FITTINGS

The Taco Venturi Fittings are designed to divert water flow from a given zone to the by-pass loop. The flow from the zone is partially diverted through the by-pass and then returned back into the zone. The Venturi Fitting creates a differential pressure that makes some of the flow want to divert

through the by-pass and back to the zone. The Taco Venturi Fitting can be used in upfeed or downfeed applications. The typical application for the Taco Venturi Fitting is to divert heated water through kickspace heaters, convectors, radiators, or baseboard.

SIZE & DIMENSIONS

Model No.	Size Inches	Dimensions-Inches		Approx. Ship. Wt. Lbs. Each
		A	B	
VF-075-050	3/4 x 1/2	2.30	1.00	1/4
VF-100-050	1 x 1/2	2.75	1.22	1/2
VF-100-075	1 x 3/4	3.0	1.41	
VF-125-050	1 1/4 x 1/2	3.0	1.30	1/2
VF-125-075	1 1/4 x 3/4	3.30	1.50	

