
VAR	MODEL	CUSTOMER	CAT. NO.	Α	В	С	D	HP	VOLTS	SF	AMPS	HZ	RPM	CONN VOLTS	PROT.	DESCRIPTION / REMARKS
001	P63AHC-1315	USEM	D34P2AH	10.03				3/4	208-230/460	1.25	2.8-2.8/1.4	60/50	1725/1425		NONE	N56, ODP

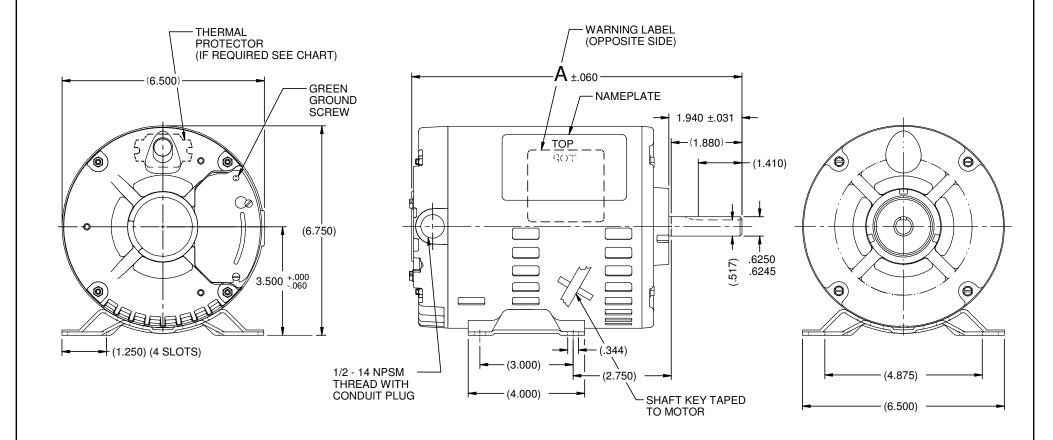

NIDEC MOTOR CORPORATION 08-Mar-18

ROTATION: REVERSIBLE, TO REVERSE ROTATION INTERCHANGE ANY TWO LINE LEADS

REFER TO S.E.I.M. 24-1

HIDES MOTOR COLLI CHATION COMMETTO												
				N DIMENSIONS	NIDEC MOTOR CORPORATION							
CHANGED WORD FROM "ITERCAMBIAR" TO "INTERCAMBIAR" IN NOTE OF ROTATION PAGE 2.				WISE SPECIFIED) mm	INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPE REPRODUCED OR DISCLOSEDWITHOUT WRITTEN CONSENT OF NIDE	REVISION DATE: 8-MAR-18						
I. GUTIERREZ	ENGINEER APPROVED : T. E	SOSSALLER	.XX = ± .010 .XXX = ±.005 ANGLES		CUSTOMER DETAIL DRAWING	V02	TEM NO. 803395	C	SHEET NUMBER 1 OF 4	DWG SIZE B		
V02_NMCB (MAR-2014)										SOLIDEDGE		