

## For Non-Health Hazard Applications

Job Name \_\_\_\_\_  
 Job Location \_\_\_\_\_  
 Engineer \_\_\_\_\_  
 Approval \_\_\_\_\_

Contractor \_\_\_\_\_  
 Approval \_\_\_\_\_  
 Contractor's P.O. No. \_\_\_\_\_  
 Representative \_\_\_\_\_

# LEAD FREE\*

## Series LFN9 Dual Check Vacuum Breakers for In-Line Applications

Size 1/4", 3/8", 1/2" (8, 10, 15mm)

Series LFN9 Dual Check Vacuum Breakers for In-Line Applications are used for continuous pressure, non-health hazard, applications. These valves have NPT female inlet and outlet connection and Lead Free\* brass body construction. The LFN9 features Lead Free\* construction to comply with Lead Free\* installation requirements.

### Options

**LFN9C** – Chrome body


### Pressure-Temperature

Temperature Range: 33°F – 140°F (0.5°C – 60°C)

Maximum Working Pressure: 125psi (8.6 bar)

### Applications


Series LFN9 should be installed on each parlor sink where a hose is attached. This series is for use on continuous pressure applications.

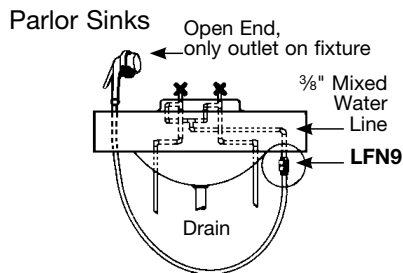

### Standards


CSA B64.8

\*The wetted surface of this product contacted by consumable water contains less than 0.25% of lead by weight.



LFN9

### Capacity

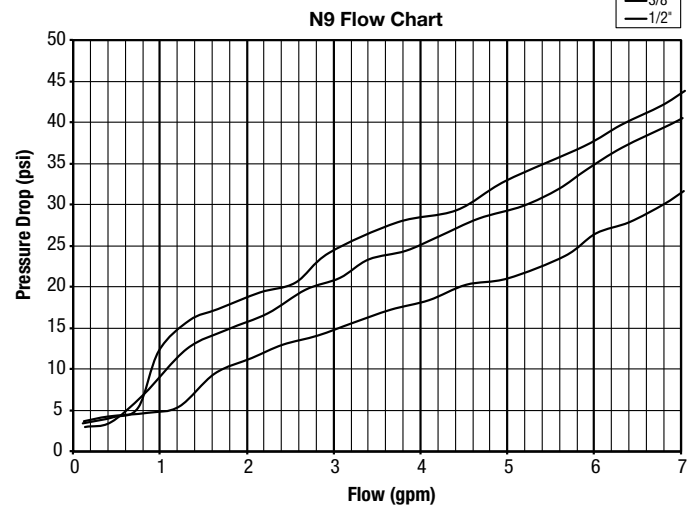

### Dimensions – Weights

MODEL	SIZE (DN)		DIMENSIONS						WEIGHT	
	in.	mm	A	B	B1				lbs.	kgs.
LFN9	1/4	6	2 3/8	1 1/4	1	25			.38	.17
LFN9	3/8	10	2 3/8	1 1/4	1	25			.38	.17
LFN9	1/2	15	2 3/8	1 1/4	1	25			.38	.17

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.



**USA:** T: (978) 689-6066 • F: (978) 975-8350 • Watts.com  
**Canada:** T: (905) 332-4090 • F: (905) 332-7068 • Watts.ca  
**Latin America:** T: (52) 81-1001-8600 • F: (52) 81-8000-7091 • Watts.com